
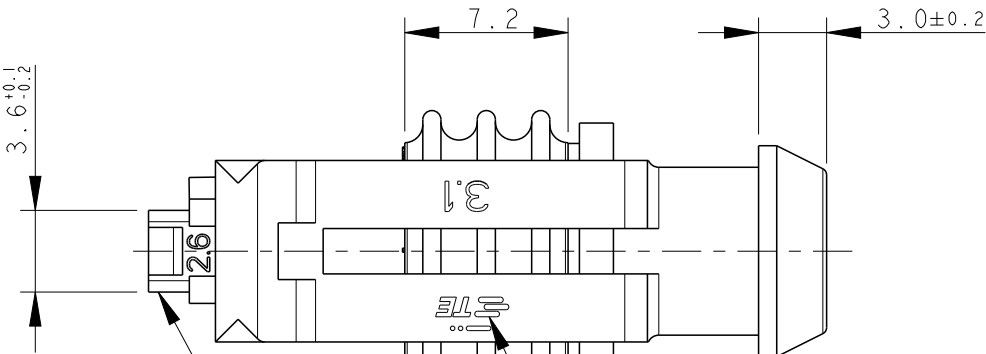
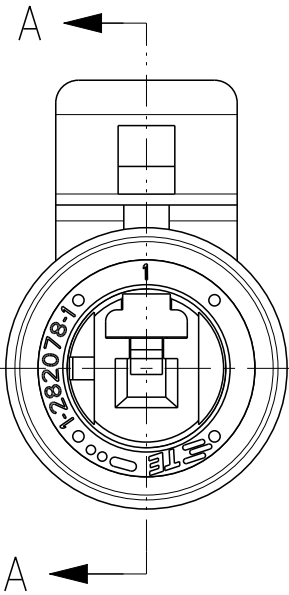


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	ECR-14-009314	24MAR2015	M.P.	M.G.
	G1	REVISED (ECR-15-014031)	25SEP2015	M.G.	M.G.
	G2	REVISED PER ECO-17-001706	10FEB2017	C.A.	M.G.
	G3	REVISED PER ECO-17-018626	18DEC2017	AP	VN

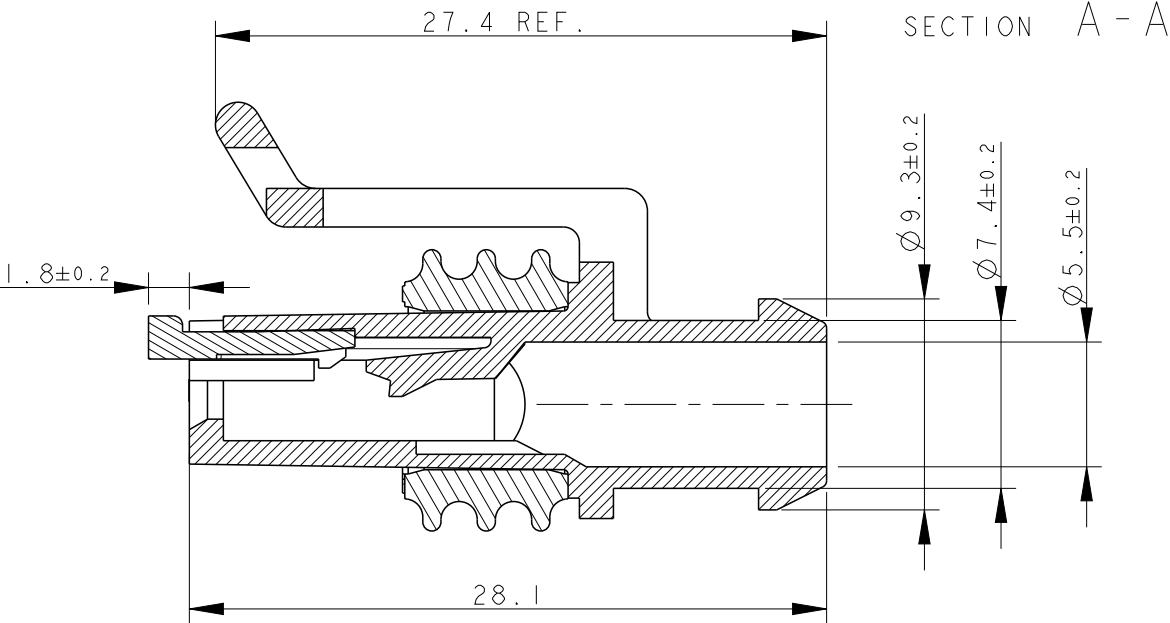


TE CONNECTIVITY TRADE MARK,
(IN ALTERNATIVE: "AMP" LOGO, OR "Tyco Electronics" LOGO)

SEALING
(COLOUR:SEE TABLE)

PRE-ASSEMBLED SECONDARY LOCK
(COLOUR RED)

⚠ WARNING: LOW RETENTION FORCE OF SEALING ON HOUSING (<9N)
2) FOR COUNTERPART DETAILS, SEE SHEET 2 OF 2

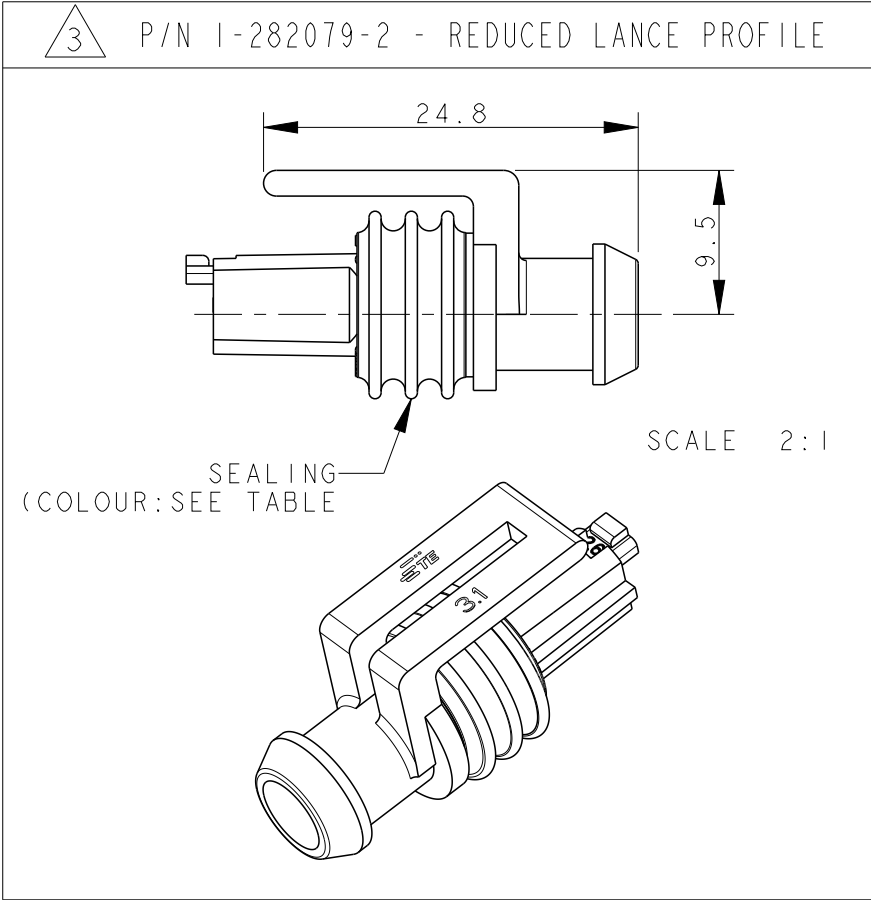

⚠	NATURAL	BLACK	HOUSING+SEC.LOCK: PA 66-GF SEALING: LSR (4% OIL CONTENT)	2-282079-2
	YELLOW	⚠ BLACK	HOUSING+SEC.LOCK: PA 66-GF SEALING: LSR (NO OIL CONTENT)	1-282079-2
	YELLOW	GRAY		282079-3
	YELLOW	BLACK		282079-2
NOTE	SEAL COLOUR	HOUSING COLOR	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. BERTINI 05-1992	TE Connectivity		
		CHK A. BRUNI 05-1992			
DIMENSIONS: mm		APVD -	NAME - AMP SUPERSEAL 1.5 SRS. 1 POSITION PLUG ASS'Y		
		PRODUCT SPEC 108-20090			
		APPLICATION SPEC 412-20000			
MATERIAL -		WEIGHT 1.55gr	SIZE A3	CAGE CODE 00779	DRAWING NO C-282079
SEE TABLE		FINISH -	RESTRICTED TO -		
SEE TABLE		Customer Drawing		SCALE 3:1	SHEET 1 OF 2
				REV G3	